



# Refurbished C2000 Tape Case Erector




**90 Day Warranty**

90 day warranty is \$900.00 in value for parts (no cash value.)  
Labour and travel are billable.

**FOB GF Delta, BC**



Item	Taper Case Former
Model	C2000
Make	Lantech
Mfg Date	2008
Speed	8 - 25 cases per minute. (Options and application can change the speed.)
Minimum Case Outer Dimensions	200 mm L x 150 mm W x 150 mm C (7 7/8" L x 5 7/8" W x 5 7/8" C)
Maximum Case Outer Dimensions	620 mm L x 450 mm W x 650 mm C (24 1/2" L x 17 3/4" W x 25 5/8" C)
Case Type	RSC, HSC, FEFCO 0200/0201
Flute Type	B, C, E
Wall Type	Single and Double Wall
Standard Sealing Device	Lantech TH-Series Tape Head
Dimensions (Machine)	2540 mm L x 2480 mm W x 1800 mm H (100" L x 97 5/8" W x 70 7/8" H)
Weight (Machine)	±825kg ( ±1800lb)
Electrical Service Choices	3L-PE-400V-50Hz-Neutral 230V, 3-ph, 60Hz, Wye w/Ground
Pneumatics	6 Bar (80 PSI)

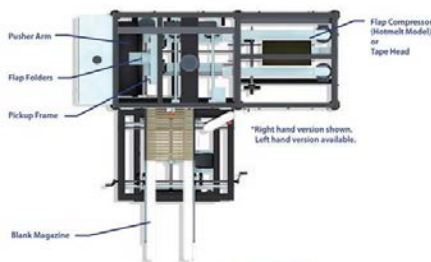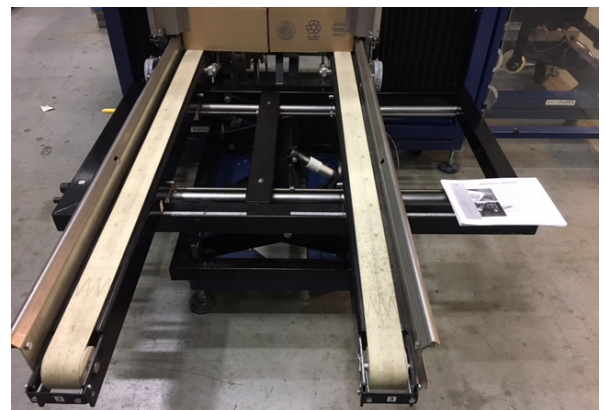

**Lantech.com**  
Case Erectors, Case Formers, Case Makers, Case Packers, Case Sealers, Case Wrappers, Case Erectors

SERIAL NUMBER	BUILD DATE	MODEL	
SM20084278	06-Oct-2008	C-2000-Tape	
VOLTAGE	AC Properties	FREQ (Hz)	FLA (A)
230	3ph+PE	60	39.8
LARGEST MOTOR (A)	ENC. TYPE	ELECTRICAL SCHEMATIC(S)	
3.8	4	084278	
PNEUMATIC REQUIREMENTS			
SUPPLY (PSI / Bar)		CONSUMPTION (CFM / ml/Min)	
80,0 / 5,5		1,0 / 115,0	
SHORT CIRCUIT PROTECTION:			
10	ka RMS SYMMETRICAL	230	V MAX.
INDUSTRIAL CONTROL PANEL FOR INDUSTRIAL MACHINERY			
OVERCURRENT PROTECTION PROVIDED AT MAIN SUPPLY TERMINALS			
SHORT CIRCUIT CURRENT RATING OF THE PROTECTIVE DEVICE (A):			20
SHORTCIRCUIT INTERRUPT RATING OF THE PROTECTIVE DEVICE (kA):			65
MACHINE ORIGIN			
Cuijk, the Netherlands			
FOR PARTS AND SERVICE CALL:			
Lantech North America 1.800.1.866.0322		Lantech Europe +31.101485.318292	